



# Video Guide Rancilio Silvia Grouphead Screen And Gasket Replacement Grouphead Gasket & Screen Replacement

Learn how to remove the clogged old screen, deep clean grouphead and install new screen and gasket.

Written By: Samuel Kanenwisher



## INTRODUCTION

Learn how to remove the clogged old screen, deep clean grouphead and install new screen and gasket.



### TOOLS:

- [Craftsman 5/16" x 1 3/4" slotted screwdriver](#) (1)
- [Wire Brush](#) (1)
- [Canned Air](#) (1)
- [3/16" Punch](#) (1)
- [Hook & Pick Set](#) (1)



### PARTS:

- [Coffee Detergent \(We like Joe Glo\)](#) (1)
- [Rancilio Silvia Grouphead Gasket and Screen](#) (1)

## Step 1 — Identify Version & Prepare Machine For Tune-Up



- Identification instructions.

## Step 2 — Remove Water Tank



- Remove water tank, hoses, and tuck them back in the machine.

### Step 3 — Flip Machine



- Remove drip tray. Flip the machine upside down.

### Step 4 — Remove The Screen & Diffuser



- Remove screen screw with flat head screwdriver.



## Step 5 — Remove the old screen.



- Remove old screen and diffuser.

## Step 6 — Remove and soak diffuser.



- Remove and soak diffuser in Joe Glo coffee cleaner.
- ⓘ On version 3 you will need to remove and soak the brass disc as well.

## Step 7 — Remove Old Grouphead Gasket



- Pry the gasket up with the sharp tip of the awl.

## Step 8 — Don't Stab Yourself!



- Carefully remove old gasket.

## Step 9 — Soak grouphead.



- Use Joe Glo coffee cleaner and hot water to soak the grouphead for 10-15 minutes.

## Step 10 — Cleaning Grouphead



- A dental pick works great for cleaning the grouphead.




## Step 11 — Clean with flathead screwdriver.



- Use a small flathead to clean the bottom surface of the grouphead.

## Step 12 — Clean with wire brush.

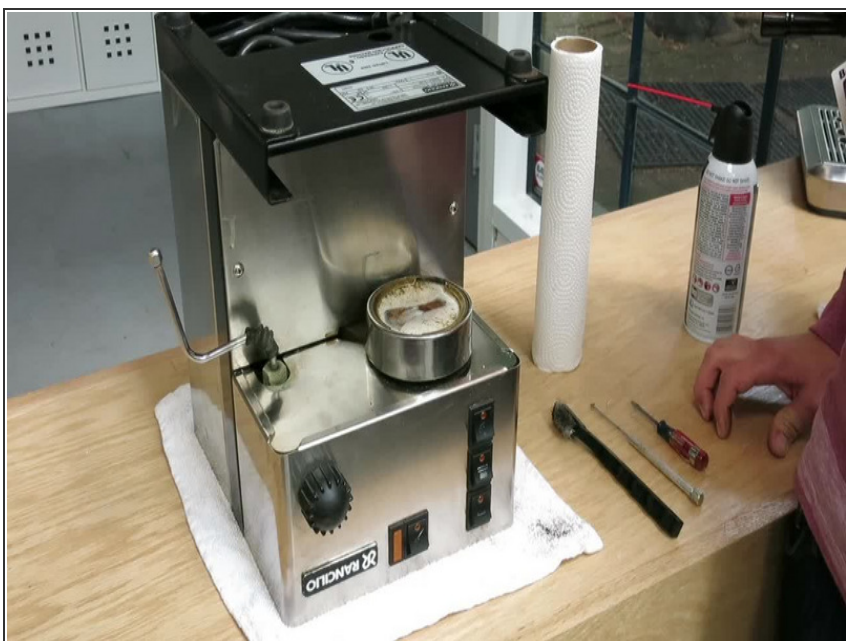

- A small stainless steel brush works well. They can be found at your local hardware store.

### Step 13 — Remove water with towel.



- Use a paper towel / regular towel to soak the dirty water from the grouphead.

### Step 14 — Blow out rest of water.



- Use the compressed air can to clean any excess water or coffee.

## Step 15 — Final scraping.



- Last but not least, use the pick on the top and bottom rails to remove last bits of coffee debris.

## Step 16 — Install New Gasket & Screen



- Remove parts from bag.



## Step 17 — Insert gasket with lettering down.



- Take the new gasket and install it with the lettering down.
- Use a 1/4 inch flat punch to push down the gasket to ensure its nice and flat.

## Step 18 — Install diffuser and screw.



- Insert the diffuser with the water channels facing down.



## Step 19 — Install 8mm screw.



- Use an 8mm socket wrench to tighten the screw.

## Step 20 — Tighten screw.



- Careful not to over tighten and break screw. It will be extremely difficult to remove.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-17 09:14:08 PM.